

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS D206-558 &
INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D206-558

REF TCCA STC SH92-17

FAA STC SH1031NE

FOR D206-558-041/-043 AT CHG 006 OR LATER, THE D3778-1 BRACKET HAS BEEN ADDED TO THE KITS TO ALLOW FOR INSTALLATION OF THE VENT CONTROL. THE D2053 BRACKET CAN BE REPLACED BY THE D3778-1 BRACKET AS DESCRIBED BELOW:

- 1) IF INSTALLED, REMOVE THE EXISTING VENT CONTROL BRACKET AND REMOVE THE VENT CONTROL.
- 2) PICKING UP ON EXISTING ANCHOR NUTS, INSTALL THE D3778-1 BRACKET USING AN526-1032R9 SCREWS.
- 3) INSTALL THE VENT CONTROL IN THE UPPER SLOT. INSTALL THE D2071 CABLE IN THE LOWER SLOT.

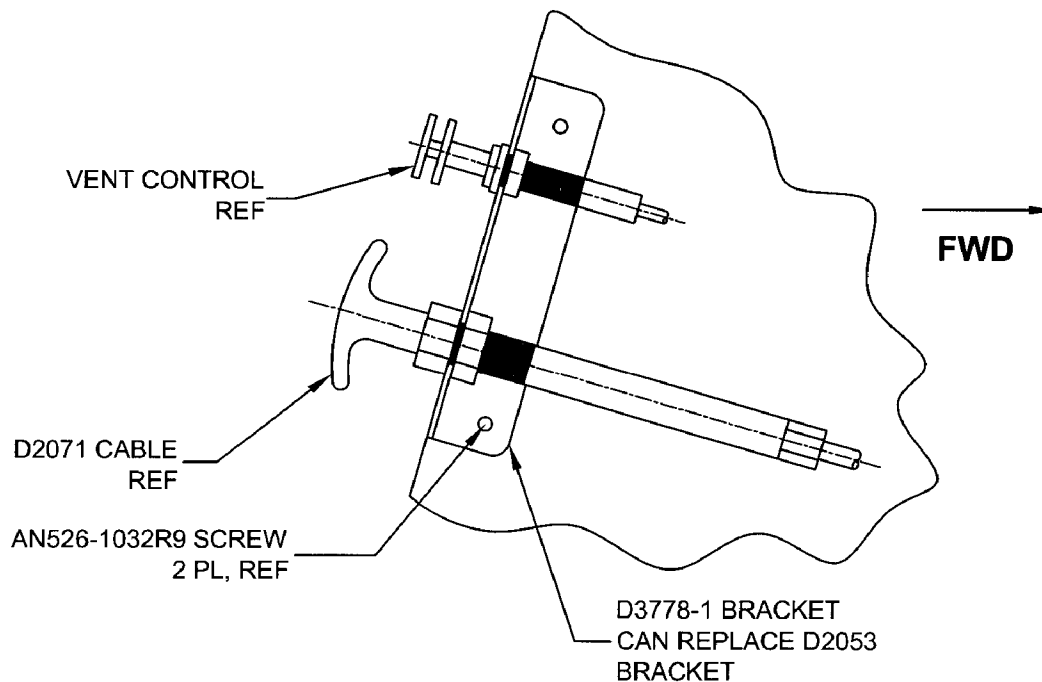


FIGURE 1 - BRACKET SUBSTITUTION

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: *[Signature]*
D. SHEPHERD (DE # 02)

DATE: 08.04.28

CERT. NO.: SH92-17

ISSUE NO.: 7

A	NEW ISSUE	PH	08.04.28
REV.	DESCRIPTION	BY	DATE
DESIGN	<i>PH</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	<i>PH</i>		
CHECKED	<i>CP</i>	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9412	SHEET 1 OF 1
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	BRACKET SUBSTITUTION	NTS
DATE	08.04.28	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	